

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
19 February 2004 (19.02.2004)

PCT

(10) International Publication Number
WO 2004/014256 A1

(51) International Patent Classification⁷: **A61F 2/06**

(21) International Application Number:
PCT/EP2003/008795

(22) International Filing Date: 7 August 2003 (07.08.2003)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
02017696.2 7 August 2002 (07.08.2002) EP

(71) Applicant (for all designated States except US): **ABBOTT
LABORATORIES VASCULAR ENTERPRISES, LTD.**
[IE/IE]; Earlsfort Centre, Terrace, Dublin 2 (IE).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **VON OEPEN,
Randolf** [DE/DE]; Gartenstr. 42, 72074 Tübingen (DE).
TRÖSKEN, Volker [DE/DE]; Justinus-Kerner-Str. 43,

72379 Hechingen (DE). **MARX, Volker** [DE/DE];
Albert-Schweitzer-Weg 67, 72379 Hechingen (DE).
STOPPER, Armin [DE/DE]; Ringstr. 10, 72401 Haiger-
loch (DE). **BALFE, Louise** [IE/DE]; Moltkestr. 49, 72072
Tübingen (DE). **COFFEY, Lorcan** [IE/DE]; Ursrainer
Ring 83, 72076 Tübingen (DE).


(74) Agent: **HEUNEMANN, Dieter**; Vossius & Partner,
Siebertstrasse 4, 81675 München (DE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU,
AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU,
CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH,
GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC,
LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW,
MX, MZ, NI, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD,
SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US,
UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (regional): ARIPO patent (GH, GM,
KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW),
Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO,

[Continued on next page]

(54) Title: APPARATUS FOR DELIVERING AND DEPLOYMENT OF AN EXPANDABLE STENT WITHIN A BLOOD VESSEL

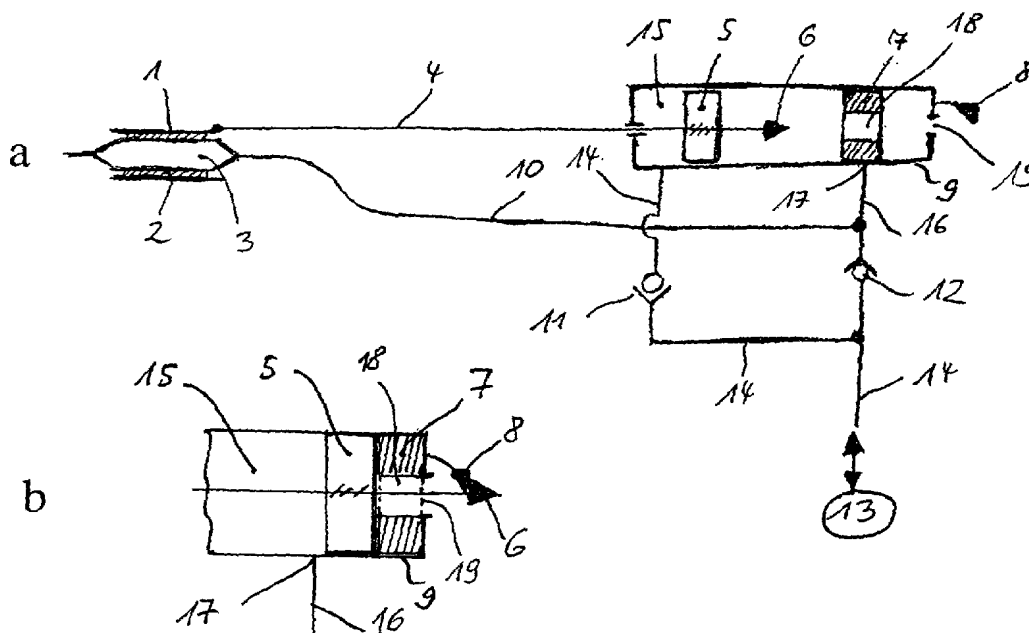

(57) Abstract: An improved apparatus for delivering and deployment of an expandable stent with a protection sheath within a blood vessel is provided. The system comprises a fluid pressure device which is coupled with a retraction device for the protection sheath such that after retraction of the protection sheath the stent is automatically deployed by the fluid pressure device. The advantage of the invention is an easy and simple operation of the apparatus.



SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

- *with international search report*
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

Apparatus for delivering and deployment of an expandable stent within a blood vessel

5

The invention relates to a system for delivering a stent into a blood vessel for use e.g. by a physician in a well-known manner for supporting and/or reinforcing the vessel walls and maintaining the vessel in an open, unobstructed condition. It is well-known in the prior art that the stent can be covered and secured in a catheter by a sheath during tracking and delivery
10 in the blood vessel.

Furthermore, it is known that the sheath is retracted before positioning the stent within the vessel. A stent delivery system according to US 6,168,617 comprises a catheter with a balloon for inflating a stent which is covered during delivering by a sheath. The sheath is axially
15 moveable on the shaft of the catheter and can be retracted in proximal direction by pull-back means. US 5,113,608 discloses a stent delivery device which comprises a hydraulically actuated retractable sheath. A pressurising fluid is either supplied by an inflation volume to a portion of a piston housing or is withdrawn from a portion of a piston housing, thereby actuating a piston. As the piston moves the sheath is retracted.

20

It is the object of the invention to provide an improved stent delivery system with a protection sheath on the stent wherein its handling is simplified.

The object is achieved by the features of the claims.

25

In order to achieve the object, the invention is based on the following basic ideas.

A device for retracting the sheath is coupled with a fluid pressure device for the inflation and deflation of expandable means (balloon) for deploying the stent. A pressurised fluid, e.g. a
30 liquid or a gas, is supplied from the fluid pressure device to the retraction device and causes the retraction of the sheath. After or during the retraction of the sheath, the pressurised fluid of the cylinder is directed to the expandable means for expansion and deployment of the stent. According to the invention, the expansion of the stent is controlled by the position of the piston within the cylinder. Thus, an automatic inflation of the expandable means after or

during retraction of the sheath can be achieved.

The invention has the following advantages.

- 5 The protection sheath is withdrawn by activating the fluid pressure device, which also controls the expansion of the stent by means of the expansion means. Furthermore, stent-loss and pop-open by using bi-stable stent designs such as Biflex-stents do not occur. There is also no flaring of stainless steel stents and no significantly increased profiles (sheath thickness 0,01 to 0,02 mm). If a drug coated stent is used, no drug will be lost during handling.

10

In the following, the invention will be explained in more detail with respect to the figures.

Fig. 1a is a schematic illustration of a first inventive embodiment,

- 15 Fig. 1b shows the partial proximal end of the cylinder 15 in Fig. 1a after retraction of the sheath,

Fig. 2 is a schematic illustration of a second inventive embodiment,

- 20 Figs 3-10 show steps of the method of operation of the second inventive embodiment,

Fig. 11 is a schematic illustration of a third inventive embodiment, and

Figs 12-19 show steps of the method of operation of the third inventive embodiment.

25

- In the first inventive embodiment of Fig. 1a, a sheath 1 is arranged on a stent 2 supported by an expandable means 3, preferably an inflatable balloon. The arrangement 1, 2 and 3 is supported by a catheter (not shown) and inserted into a blood vessel. Furthermore, a sheath retraction device 5 to 9, 11 and 13 to 15 and a fluid pressure device 11 to 14 are connected
30 with the arrangement 1 to 3 by a wire 4 and a tube 10, respectively. The wire 4 connects the sheath 1 with a first piston 5 in a cylinder 15 comprising a cylinder housing 9. A hook 6 is connected at the proximal side of the piston 5. The cylinder 15 further comprises a floating second piston 7 with an opening 18 which can be penetrated by the hook 6. The floating

piston 7 closes an outlet 17 in the cylinder 15. The tube 10 connects the expandable means 3 with a tube 16 mounted at the outlet 17 of the cylinder 15. A tube 14 is connected to a inflation/deflation device schematically shown as double-arrow 13 at the one end and via a unidirectional valve (check valve) 11 with the cylinder 15 at the other end. Furthermore, the tube 14 is connected via a unidirectional valve (check valve) 12 with the tube 10.

The first inventive embodiment operates as follows.

In the arrangement of Fig. 1a the expandable means 3 is in a deflated state and the sheath 1 covers the stent 2. The floating second piston 7 is positioned so that the opening 17 of the cylinder housing 9 and, thus, the tube 16 are closed. An operator (physician) applies pressure from the inflation/deflation device 13 to the tube 14. The pressure shuts the unidirectional valve 12 and opens the unidirectional valve 11. Thus, the pressurised fluid flows into the cylinder 15 and shifts the first piston 5 with the wire 4 and the sheath 1 in proximal direction, i.e. the sheath 1 is retracted from the stent 2. The pressure necessary for moving the piston 5 is very low. When the first piston 5 reaches the floating second piston 7, the proximal end of the wire 4 with the hook 6 penetrates the opening 18 in the piston 7, and the piston 5 moves the piston 7 to the proximal end of the cylinder 15. Thereby, the hook 6 engages the hook holder 8 wherein the piston 5 with the wire 4 and the sheath 1 is fixed at the proximal end. This fixed position of the pistons 5 and 7 is shown in figure 1b. In this position, the sheath is completely removed (not shown) from the stent 2, and the outlet 17 of the cylinder 15 is open towards the cylinder chamber. In this manner, the pressurized fluid from the inflation/deflation device 13 flows via the tube 14 and the left side of the cylinder 15 through the outlet 17, the tube 16 and the tube 10 to the expandable means 3, inflates it and deploys the stent 2. The pressure is applied until a required stent diameter is reached. Then, the operator applies a vacuum from the inflation/deflation device 13 via the unidirectional valve 12 and the tube 10 to the expandable means 3. During this suction, the unidirectional valve 11 is closed. At the end of the stent delivery and deployment process, the catheter with the expandable means and the sheath is removed from the blood vessel and the stent remains in the desired position within the blood vessel.

In the second inventive embodiment of Fig. 2 as in Fig. 1a, a protective cover sheath 101 is arranged on a stent 102 supported by an expandable means 103 being an inflatable balloon. As

in Fig. 1a, the arrangement 101, 102 and 103 is supported by a catheter (not shown) and is inserted into a blood vessel. The arrangement 101, 102 and 103 is connected via a pull-wire 104 to a cylinder-piston arrangement 105, 106, 108, 110, 110a, 112 and 114. The cylinder-piston arrangement is connected to an inflation/deflation device schematically shown as an arrow 113. A piston 105 with a connector ball 106 is arranged in the cylinder 115 at its distal end 115a. The wire 104 is fixed at the piston. At the proximal end 115b of the cylinder 115 a receiving socket 108 is located, into which the connector ball engages when the piston arrives at the end, i.e. the right-hand side in Fig. 2, of the cylinder 115. Furthermore, the cylinder-piston arrangement comprises a unidirectional valve 112, fluid pressure lines 114, 110, 110a and an inlet/outlet 117 as connection to the inflation/deflation device 113.

With respect to Figs 3-10, the steps of operation of the second inventive embodiment are shown. In the second and subsequently in the third inventive embodiment, the fluid F is illustrated by black colour.

Firstly, vacuum from the inflation/deflation device 113 is applied (Fig. 3) in order to purge air from the catheter and the sheath retraction apparatus. In this state, the unidirectional valve 112 is opened and all parts of the apparatus are in connection with the vacuum. After removing the air from the apparatus, pressurized fluid F (e.g. liquid) is introduced from the inflation/deflation device 113 via the inlet/outlet 117. The pressurized fluid F shuts the unidirectional valve 112 and enters the cylinder 115 at its distal end 115a behind the piston 105 (i.e. at the left-hand side of the piston in Fig. 4). The pressurized fluid F moves the cylinder 105 in proximal direction wherein the wire 104 retracts the protective cover sheath 101 from the stent 102 (arrow A in Fig. 5). During this procedure, the liquid is prevented from entering the catheter and the expandable means 103. As shown in Fig. 6, after arrival of the piston 105 at the proximal end 115b of the cylinder 115, the cover sheath 101 is completely removed from the stent 102, the connector ball 106 is engaged in the receiving socket 108 and a opening 110a, which penetrates the cylinder wall to the fluid pressure line 110 is opened. The pressurized fluid F from the inflation/deflation device 113 via the line 114 and the cylinder 115 enters the line 110 and inflates the expandable means 103 (Fig. 7). The expandable means (balloon) 103 expands and the stent 102 is deployed and contacts the wall of the blood vessel (Fig. 8). Thereafter, the fluid is withdrawn and a vacuum is again applied by means of the inflation/deflation device 113 to deflate the balloon while the piston 105 and

the cover sheath 101 remain fixed (Fig. 9). In Fig. 10, the system is fully purged of fluid (e.g. liquid) and the balloon 103 can be re-inflated if necessary, or the expandable means and sheath may be removed from the blood vessel while the stent remains in the desired position within the blood vessel.

5

Fig. 11 shows a third inventive embodiment, which differs from the first and second embodiment in the structure of the cylinder-piston arrangement. A two-position valve 207 is located in the cylinder 215; the valve 207 abuts via a spring 207a at the proximal end 215b (right hand side in Fig. 11) of the cylinder 215. In the position shown in Figs 11 to 14, the valve 207 shuts two channels 216a, 216b which penetrate the wall of the cylinder 215; channel 216a connects a fluid pressure line 214 from the fluid pressure device 213 with a fluid pressure line 210 which applies the fluid pressure to the expandable means (balloon) 203. When the piston 205 starting from the space 215a at the distal end of the cylinder 215 arrives at the two-position valve 207, it pushes the valve (to the right in Fig. 15) and opens the channels 216a and 216b. Thus, pressurized fluid F from the inflation/deflation device 213 enters the balloon 203 via the line 214, the channels 216a and 216b and the line 210 (Figs 15 to 17).

The steps of the method of operation of the third inventive embodiment are shown with respect to Figs. 12-19.

20

Before operating, a vacuum is applied in order to purge air from the catheter and the sheath retraction apparatus by means of the inflation/deflation device 213. Thereby, the unidirectional valve 212 is opened and the unidirectional valve 211 is closed so that space 215a at the distal end of the cylinder 215 at the left-hand side of the piston 205 remains open (Fig. 12). In Fig. 13, pressurized fluid F from the inflation/deflation device 213 enters the space 215a of the cylinder 215 behind the piston 205 via the line 214 and the unidirectional valve 211, while the unidirectional valve 212 and the channels 216a and 216b are closed. Thereafter, the piston 205 moves in proximal direction (to the right in Fig. 14) and withdraws the protective cover sheath 201 from the stent 202 in the direction of arrows A (Fig. 14). After the protective cover sheath 201 is fully retracted, the piston 205 pushes the valve 207 against the force of the spring 207a into an open position, and the connection between the line 214 and the line 210 via the channels 216a and 216b is opened (Fig. 15). As shown in Fig. 16,

30

pressurized fluid F flows via the line 214, the channels 216a and 216b and the line 210 to the balloon 203. While the unidirectional valve 211 remains open and pressurized fluid F acts against the piston 205 and pushes it to the right in Fig. 17, the two-position valve 207 remains in its open position. The balloon 203 expands in the direction of arrows B and the stent is
5 deployed (Fig. 17) and contacts the wall of the blood vessel (not shown). Thereafter, vacuum is again applied from the inflation/deflation device 213 and the balloon 203 deflates in the direction of arrows C (Fig. 18). The unidirectional valve 211 is closed and the pressurized fluid behind the piston 205 acts on the piston 205 such that the piston 205 and the sheath 201 remain fixed (Fig. 18). In the final state shown in Fig. 19, the catheter is fully purged and the
10 balloon can be re-inflated if necessary. The pressurized fluid F holds the two-position valve 207 open and locks the sheath 201 in the retracted position. If the retraction apparatus will be used one time only, it can be removed. If the retraction apparatus will be re-used, the fluid F is purged from the cylinder 215 by opening the unidirectional valve 211 and pulling the piston 205 to the distal end 215a.

15 The fluid pressure for operating the retraction device and the expandable means can be controlled in such a manner that the retraction device and the expandable means work concurrently or sequentially, e.g. in order to control the correct position of the stent.

20 It is an essential feature of the invention that the retraction of the sheath 1, 101 and 201, respectively, namely at the end of the retraction step, automatically controls the deployment (expansion) of the stent 2, 102 and 202, respectively. An operator can easily deploy a stent with a protection sheath simply by activating the inflation/deflation device.

Claims

1. An apparatus for delivery and deployment of an expandable stent (2; 102; 202) within a vessel, the apparatus comprising:

- 5
- (a) a catheter having a proximal end and a distal end,
- (b) an expandable means (3; 103; 203) mounted at the distal end of the catheter and being expandable by means of a fluid pressure device (10, 12-14; 110, 113-115; 210, 213, 214, 216),
- 10
- (c) the expandable stent (2; 102; 202) being expandable from a delivery diameter to a deployment diameter and being mounted on the catheter over the expandable means (3; 103; 203),
- 15
- (d) a sheath (1; 101; 201) being slidably mounted on the stent (2; 102; 202) and being arranged for proximal retraction to expose the stent (2; 102; 202) by means of a retraction device (4-9, 11, 13-15; 104, 105, 113-115; 204, 211, 213-215), wherein
- 20
- (e) the fluid pressure device (10, 13-14; 110, 113-115; 210, 213, 214, 216) is further arranged for operating the retraction device (4-9, 11, 13-15; 104, 105, 113-115; 204, 211, 213-215) so that the expandable means (3; 103; 203) is expanded in response to the retraction of the sheath (1; 101; 201).
- 25

2. The apparatus according to claim 1, wherein the retraction device comprises a cylinder-piston arrangement (5, 7, 9, 15; 105, 115; 205, 207, 215) operated by the fluid pressure.

- 30 3. The apparatus according to claim 1 or 2, comprising a control means (7, 5, 11, 12; 105, 112; 205, 211, 212, 207) for controlling the fluid pressure operating the retraction device and the expandable means, either concurrently or sequentially.

4. The apparatus according to claim 2 or 3, wherein a first piston (5; 105; 205) of the cylinder-piston arrangement (5, 7, 15; 105, 115; 205, 207, 215) is connected to the sheath (101; 201) via a wire (4; 104; 204).
- 5 5. The apparatus according to any of claims 2 to 4, wherein the cylinder-piston arrangement (5, 7, 15; 105, 115) comprises an outlet (17; 110a) connected to a fluid pressure line (16, 10; 110) for applying the fluid pressure to the expandable means (3; 103).
- 10 6. The apparatus according to claim 5, wherein the cylinder-piston arrangement (5, 7, 15) comprises a floating second piston (7) for controlling the opening/closing of the outlet (17).
- 15 7. The apparatus according to claim 5 or 6, wherein during retraction of the sheath (1) either the first piston (5) or the second piston (7) close the outlet (17), and after at least partial retraction of the sheath (1) the first and second pistons (5, 7) are in a position at the proximal end of the cylinder (15) and the outlet (17) is open.
- 20 8. The apparatus according to claim 7, wherein the first piston (5) comprises a hook (6), the second piston (7) comprises a first central opening (18), the cylinder (15) comprises a second opening (19) and a hook holder (8) at its proximal end, so that during retraction of the sheath (1) the shifting first piston (5) moves the hook (6) through the first opening (18) and the second opening (19) until the hook (6) engages the hook holder (8).
- 25 9. The apparatus according to claim 5, wherein the first piston arrangement (105) comprises a connector means (106) and the cylinder (115) comprises at its proximal end a receiving means (108) for the connector means (106), so that after retraction of the sheath (101) the connector means (106) engages the receiving means (108) and the outlet (110a) is in connection with the fluid pressure acting on the first piston (105).
- 30 10. The apparatus according to claim 4, wherein the cylinder-piston arrangement comprises the first piston (205) and a two-position valve (207) abutting via a spring

(207a) at the proximal end (215b) of the cylinder (215), wherein
in a closed position the valve (207) shuts by the spring force channels (216a, 216b)
penetrating the wall of the cylinder (215), and
in an open position, the valve (207) opens the channels (216a, 216b) after it is pushed
5 by the piston (205) when the sheath (201) is retracted and connects a fluid pressure
line (214) from the fluid pressure device (213) with a fluid pressure line (210) so that
the fluid pressure is applied to the expandable means (203).

11. Apparatus according to any of claims 1 to 10, wherein the fluid is liquid.

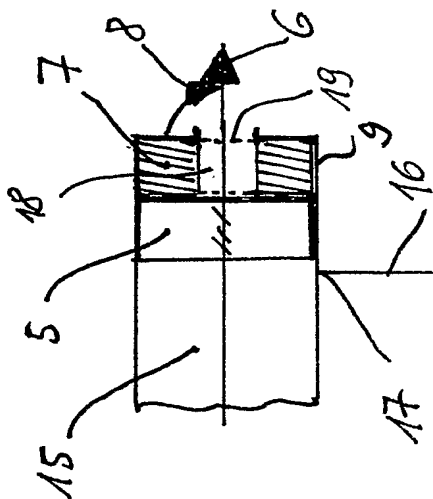


Fig. 1 b

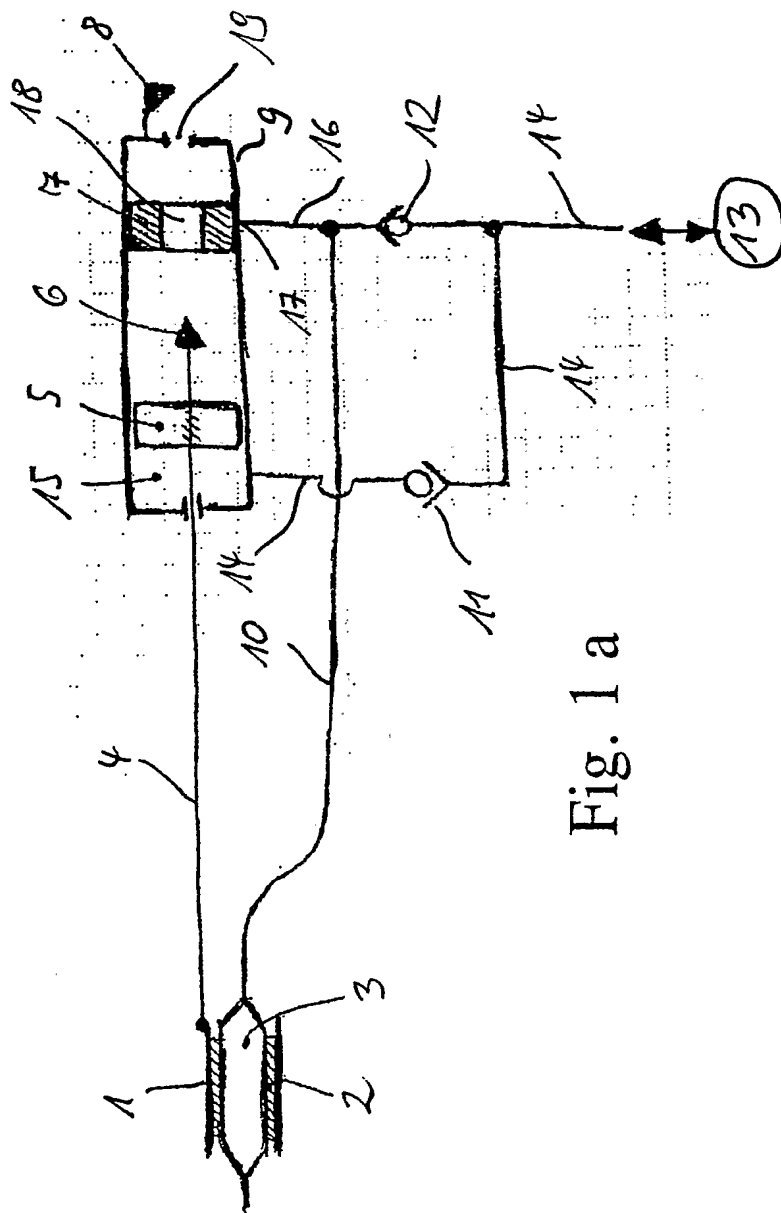


Fig. 1 a

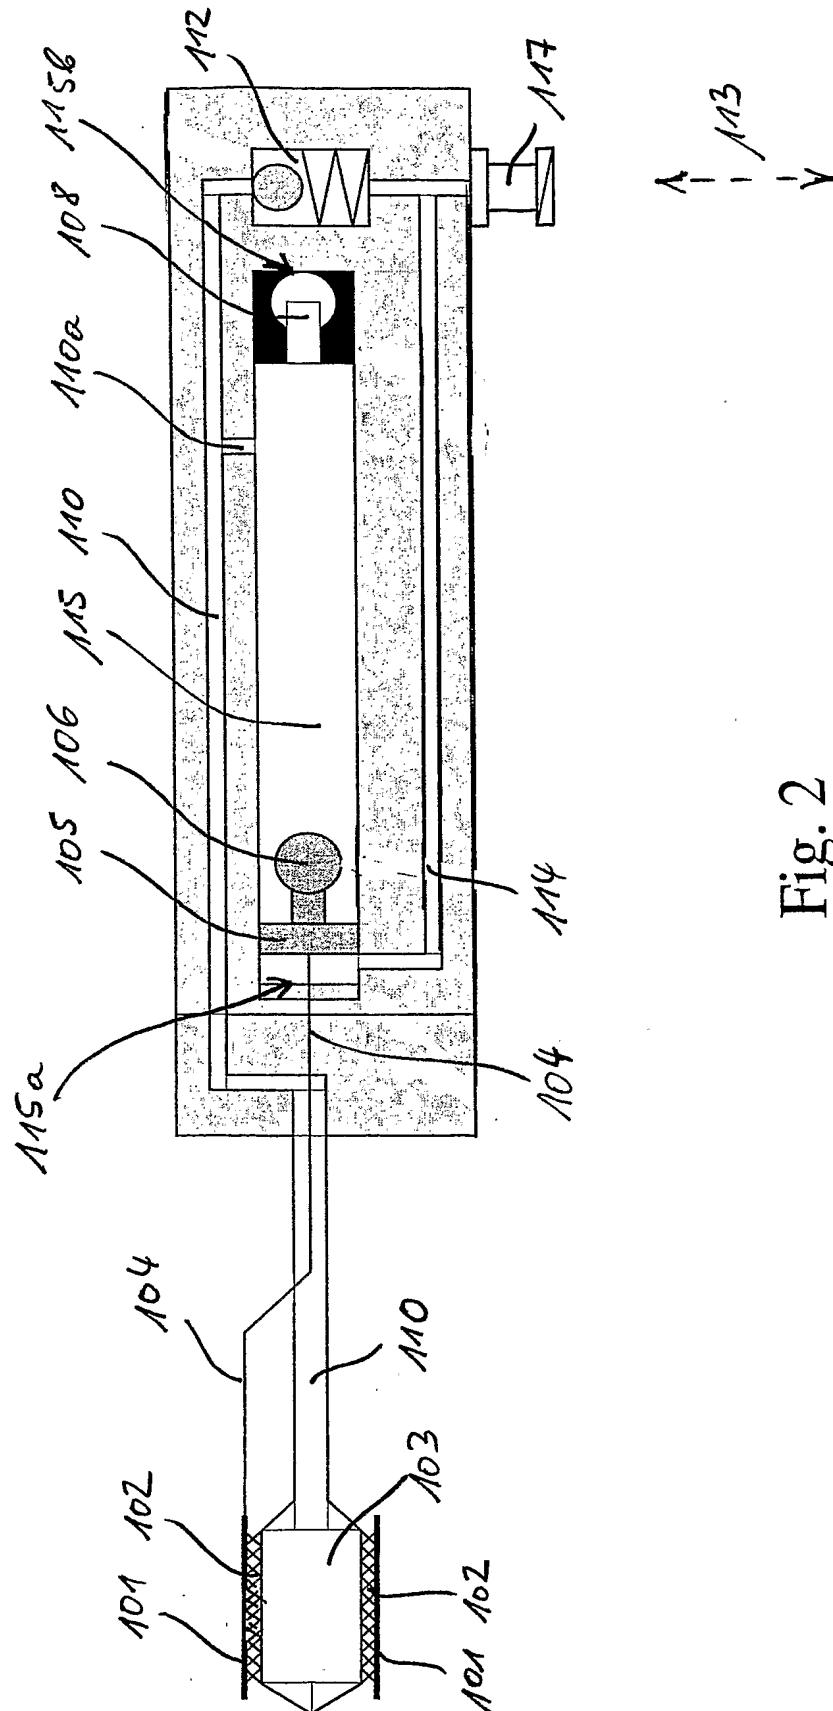


Fig. 2

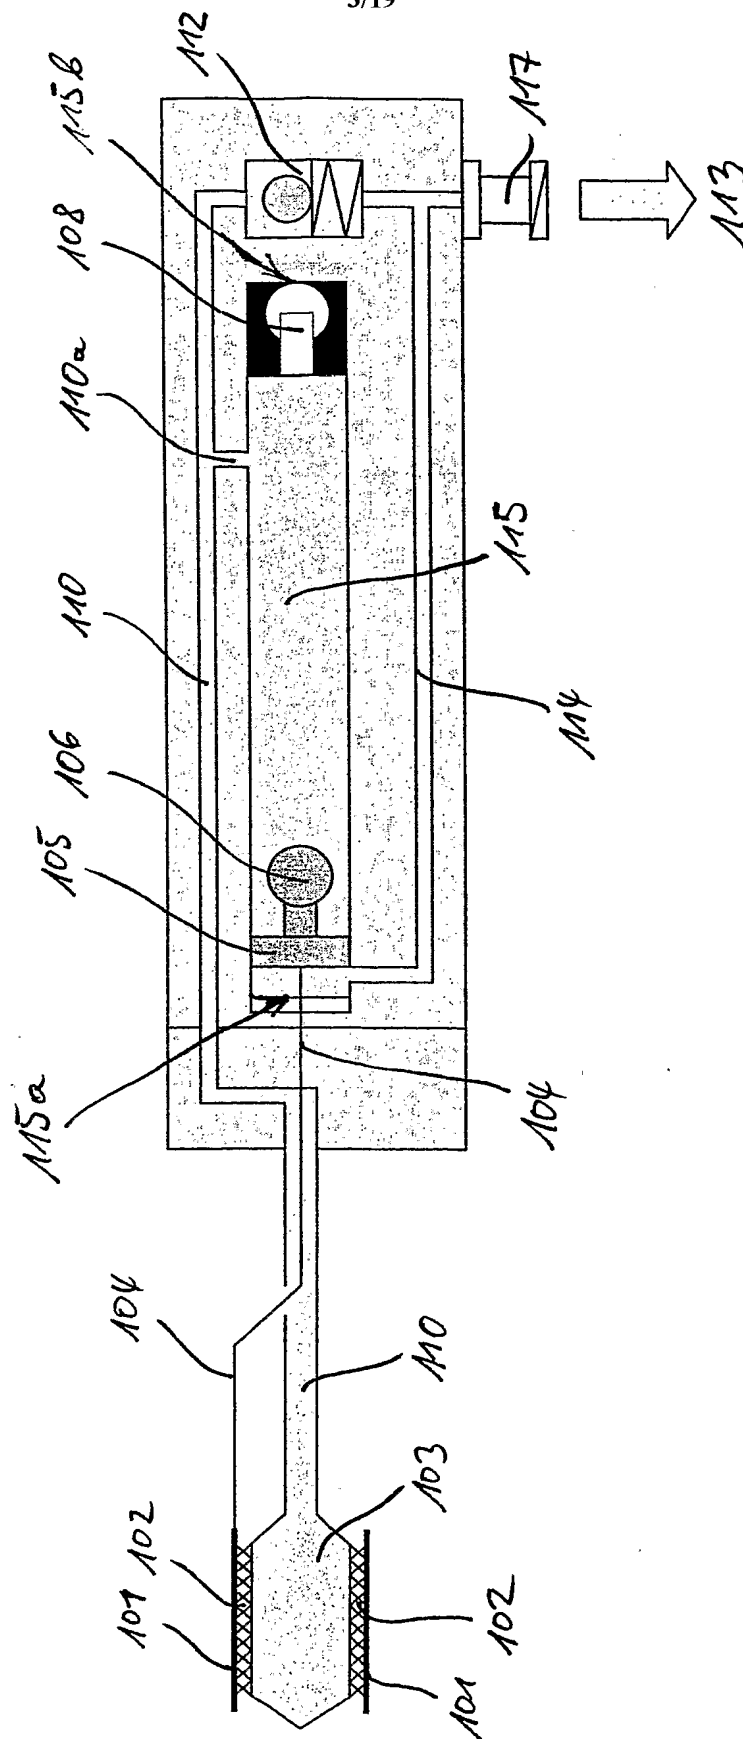


Fig. 3

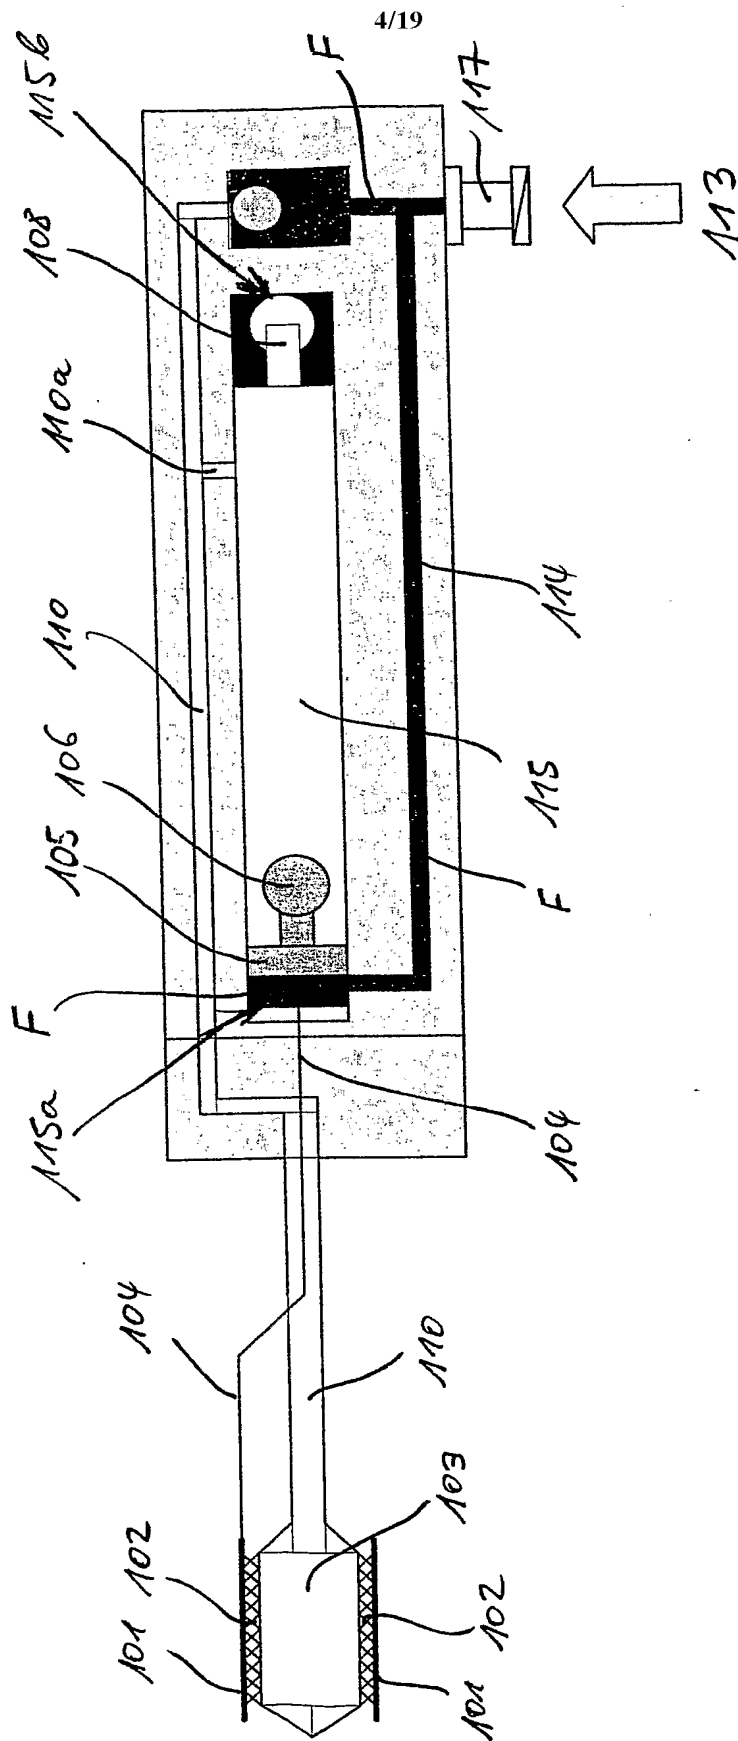


Fig. 4

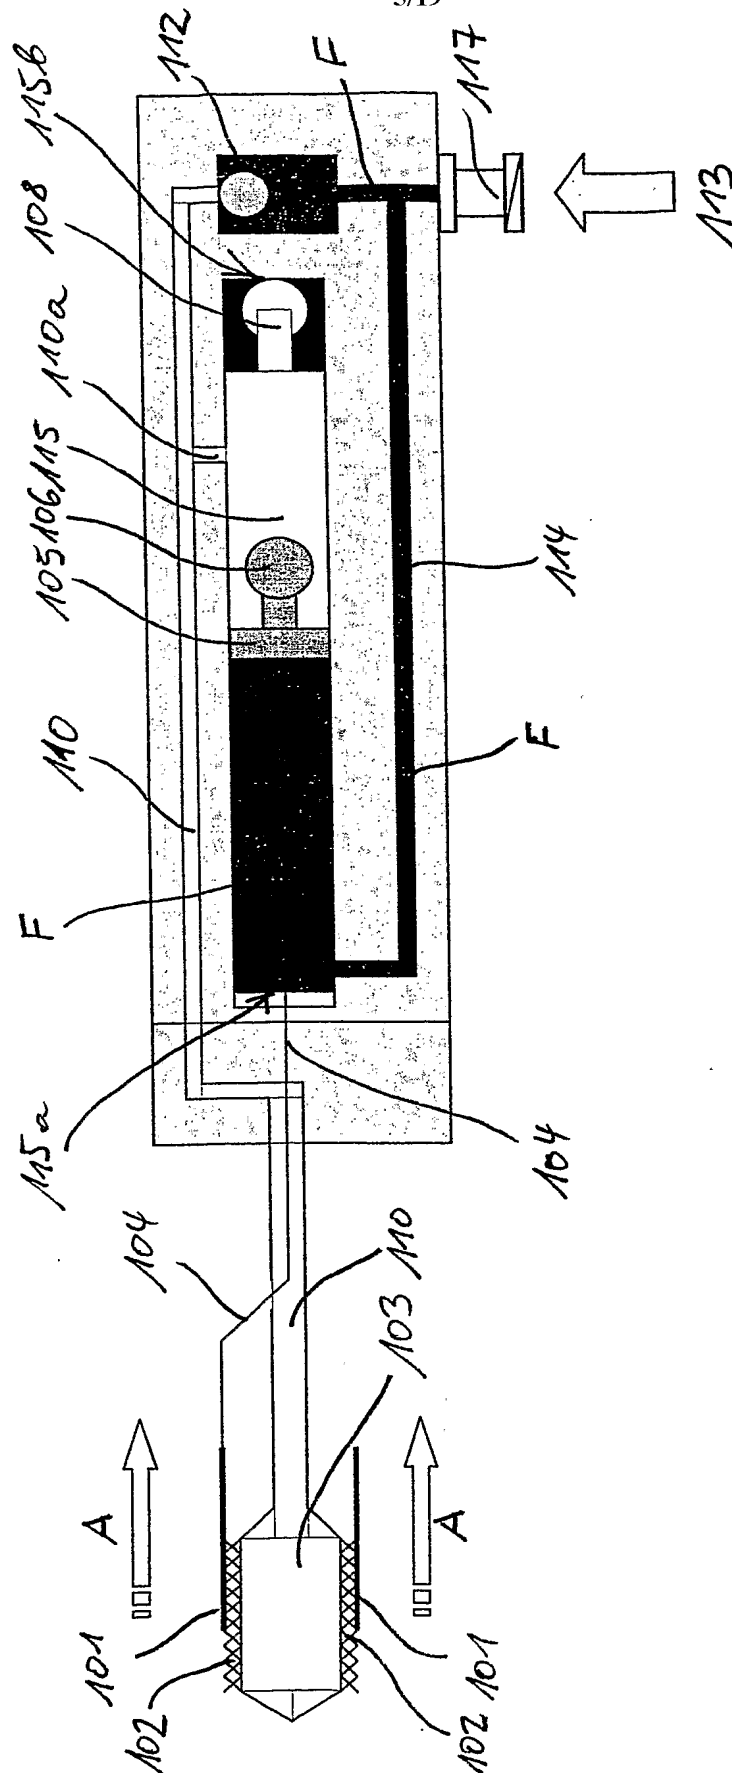


Fig. 5

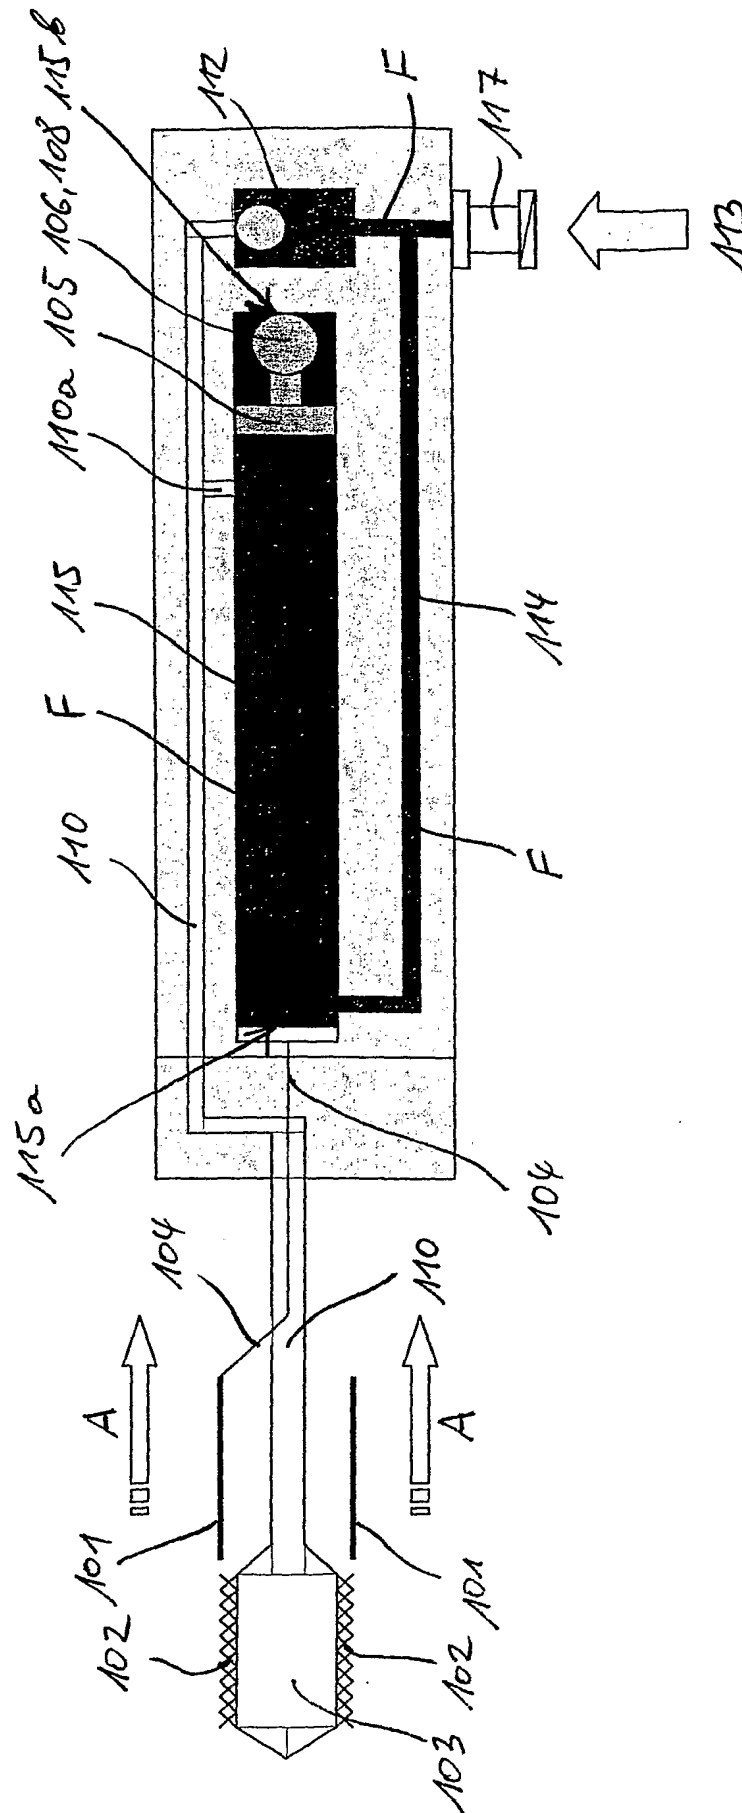


Fig. 6

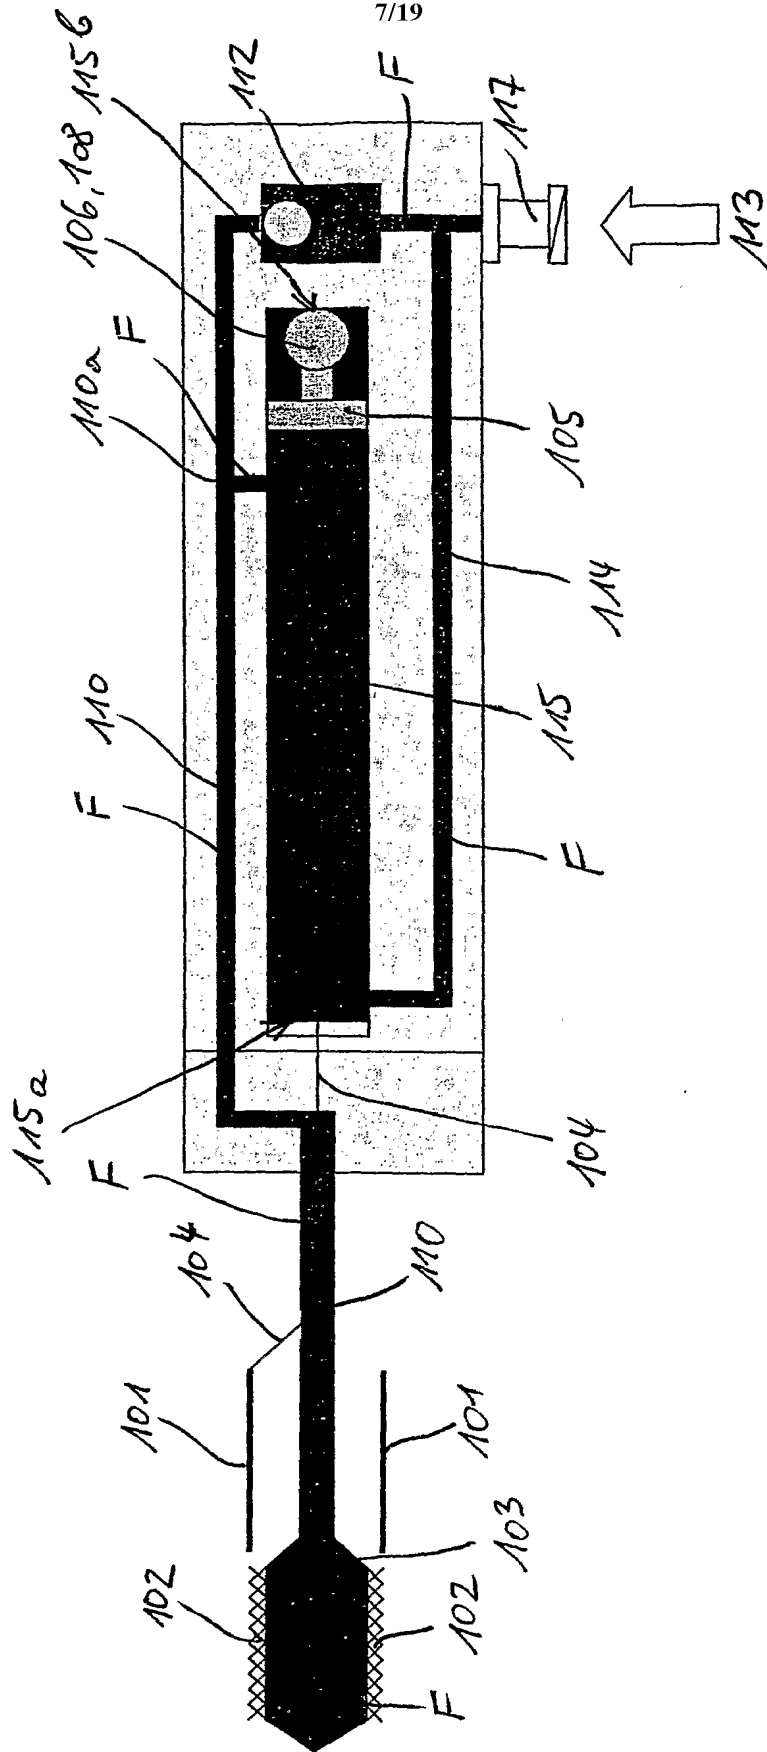
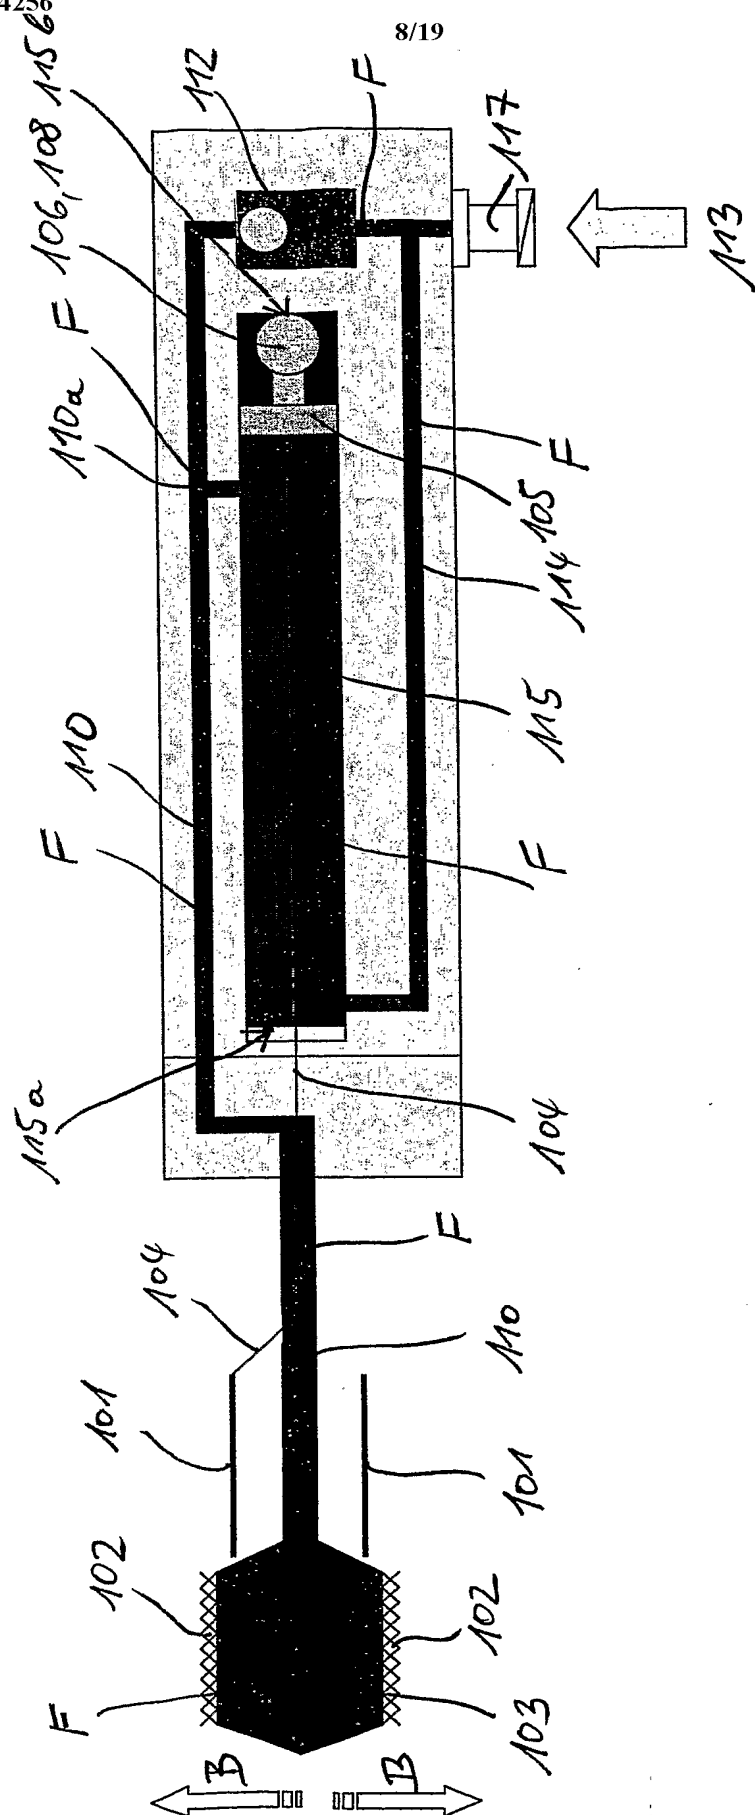


Fig. 7


$$\infty$$

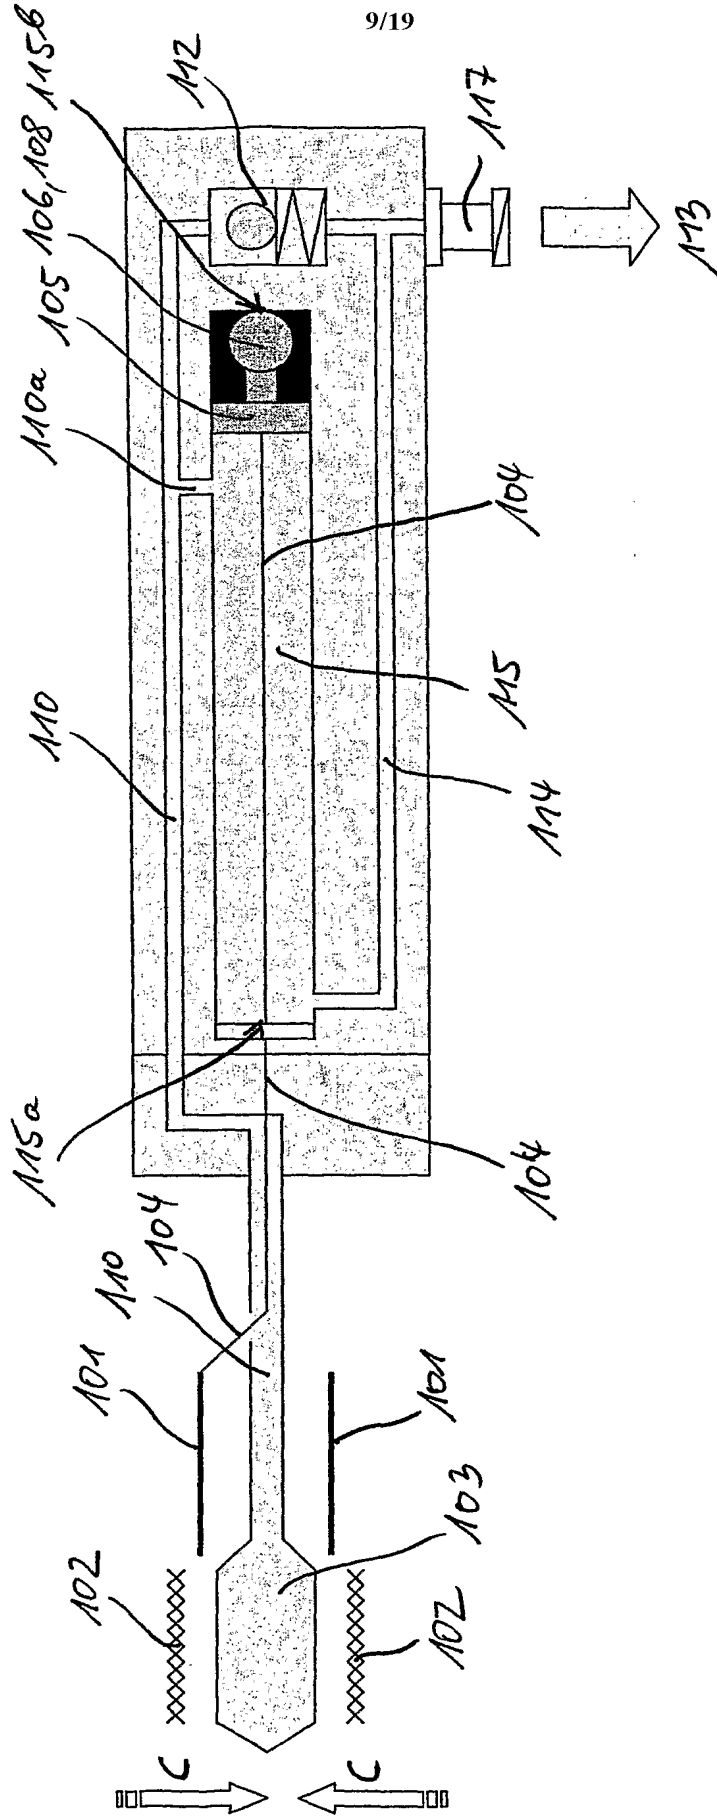


Fig. 9

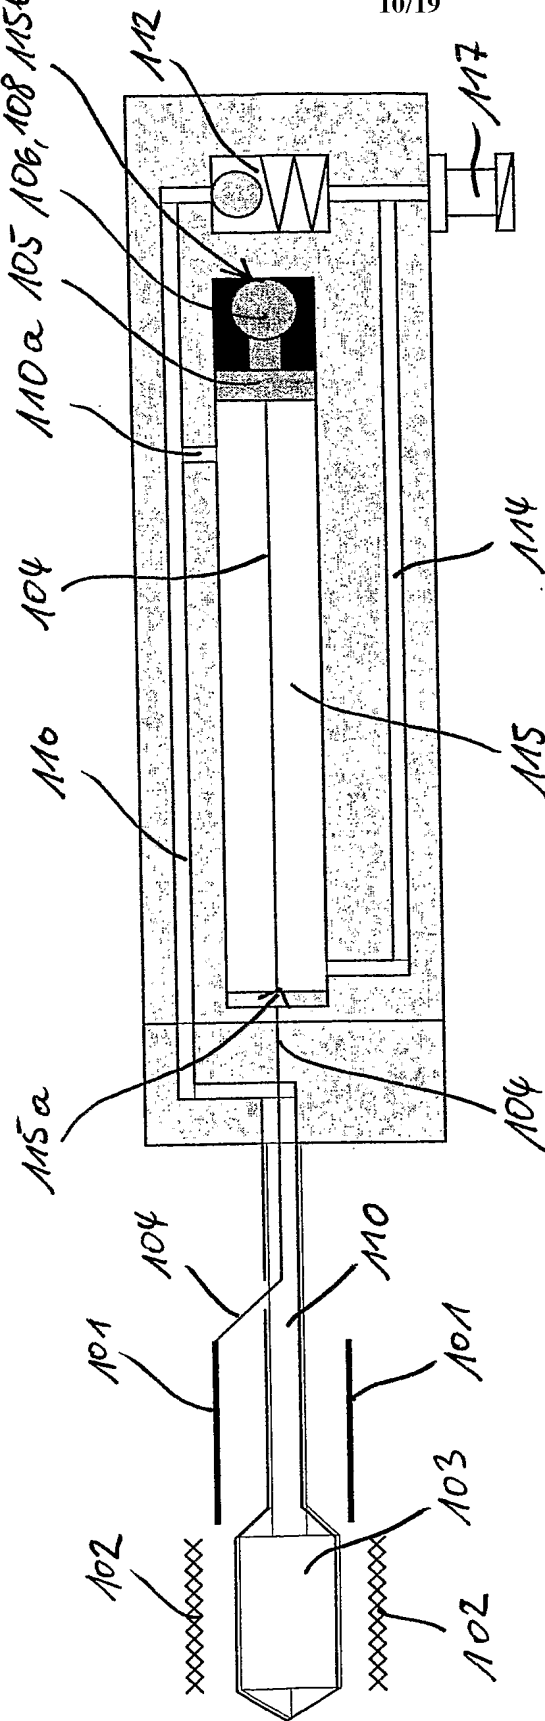


Fig. 10


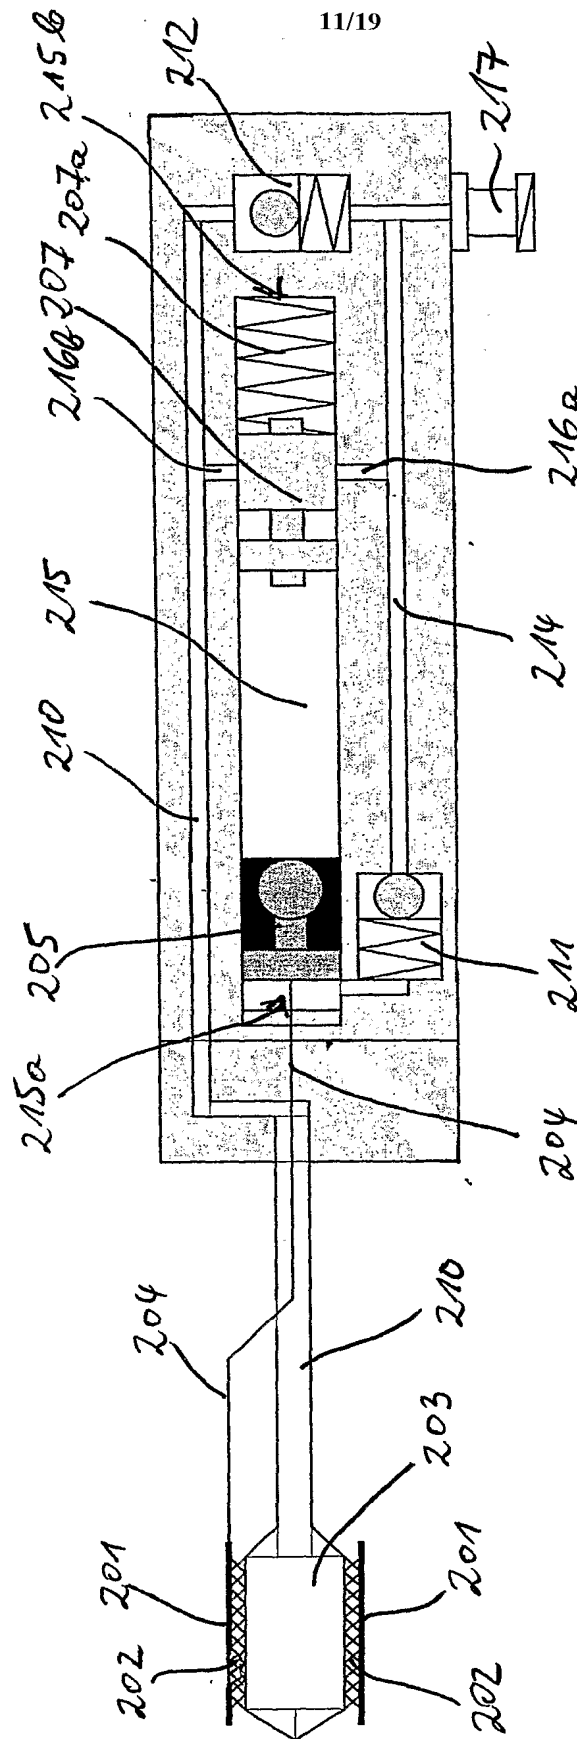


Fig. 11

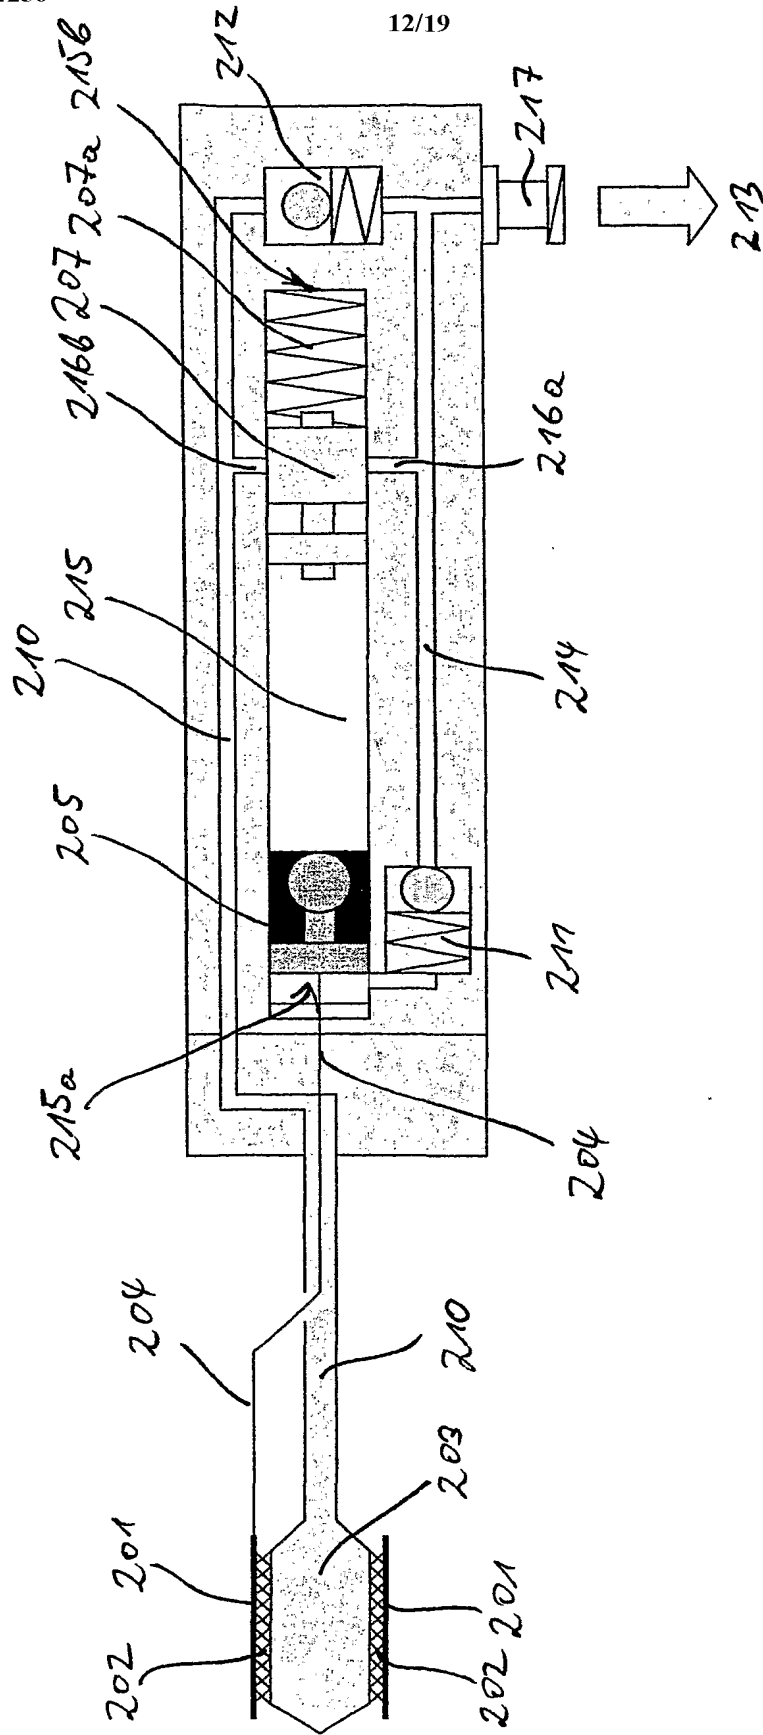


Fig. 12

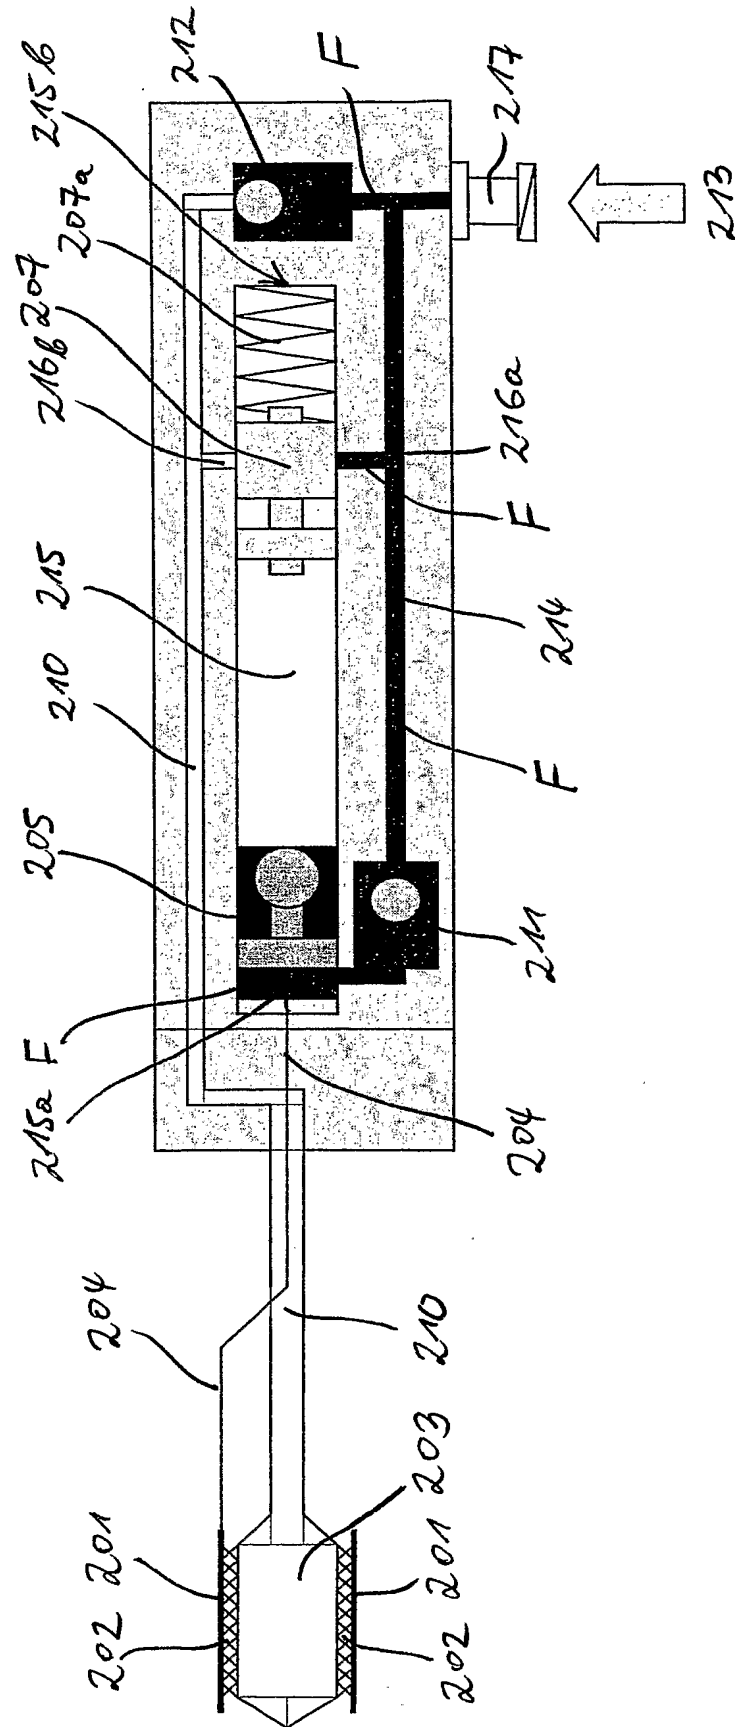
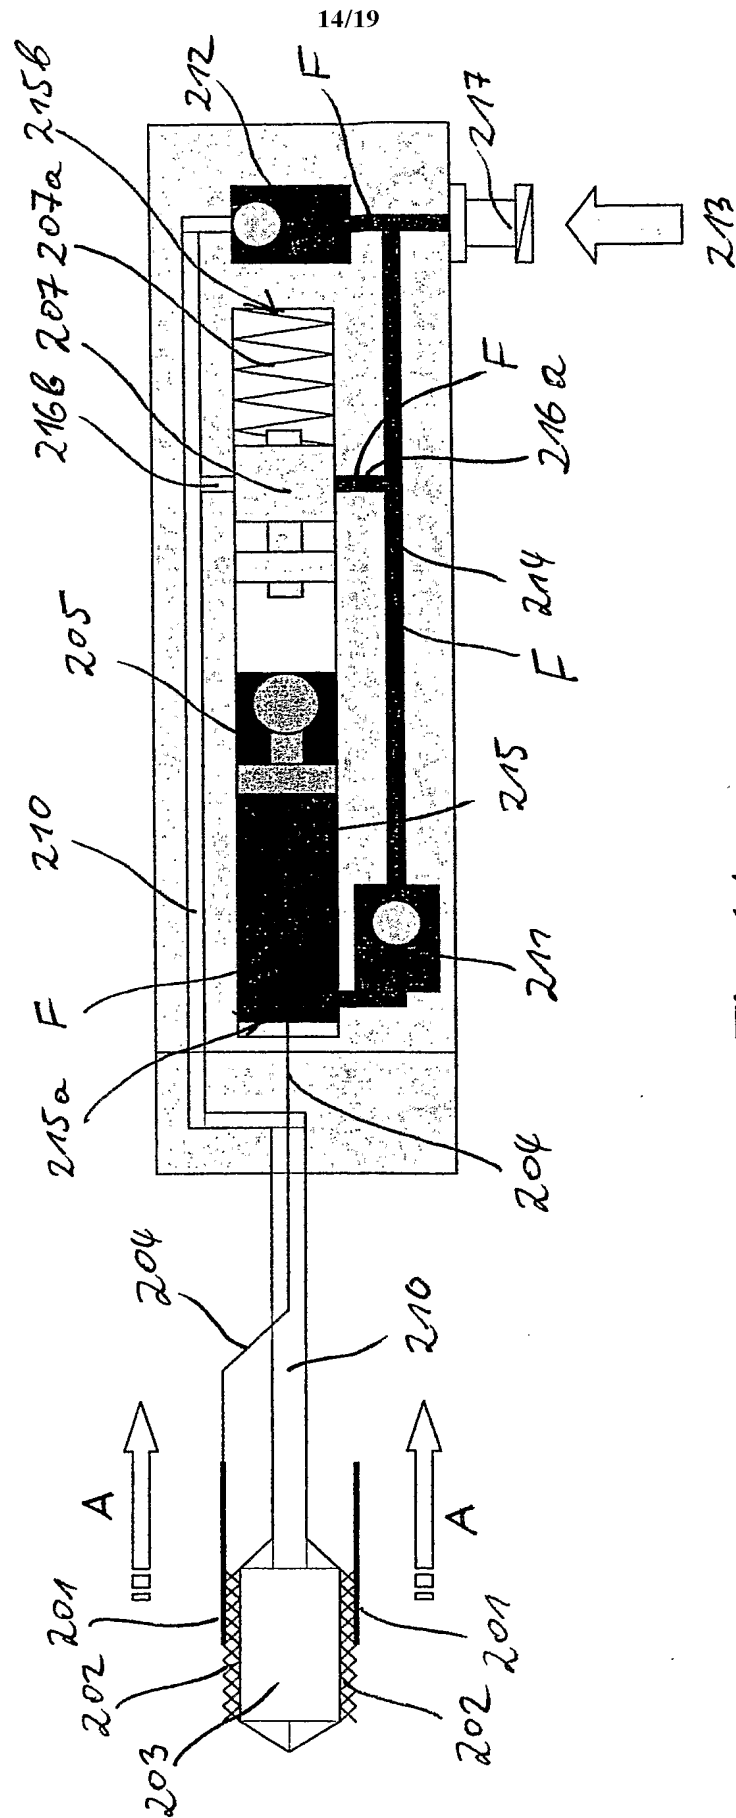


Fig. 13



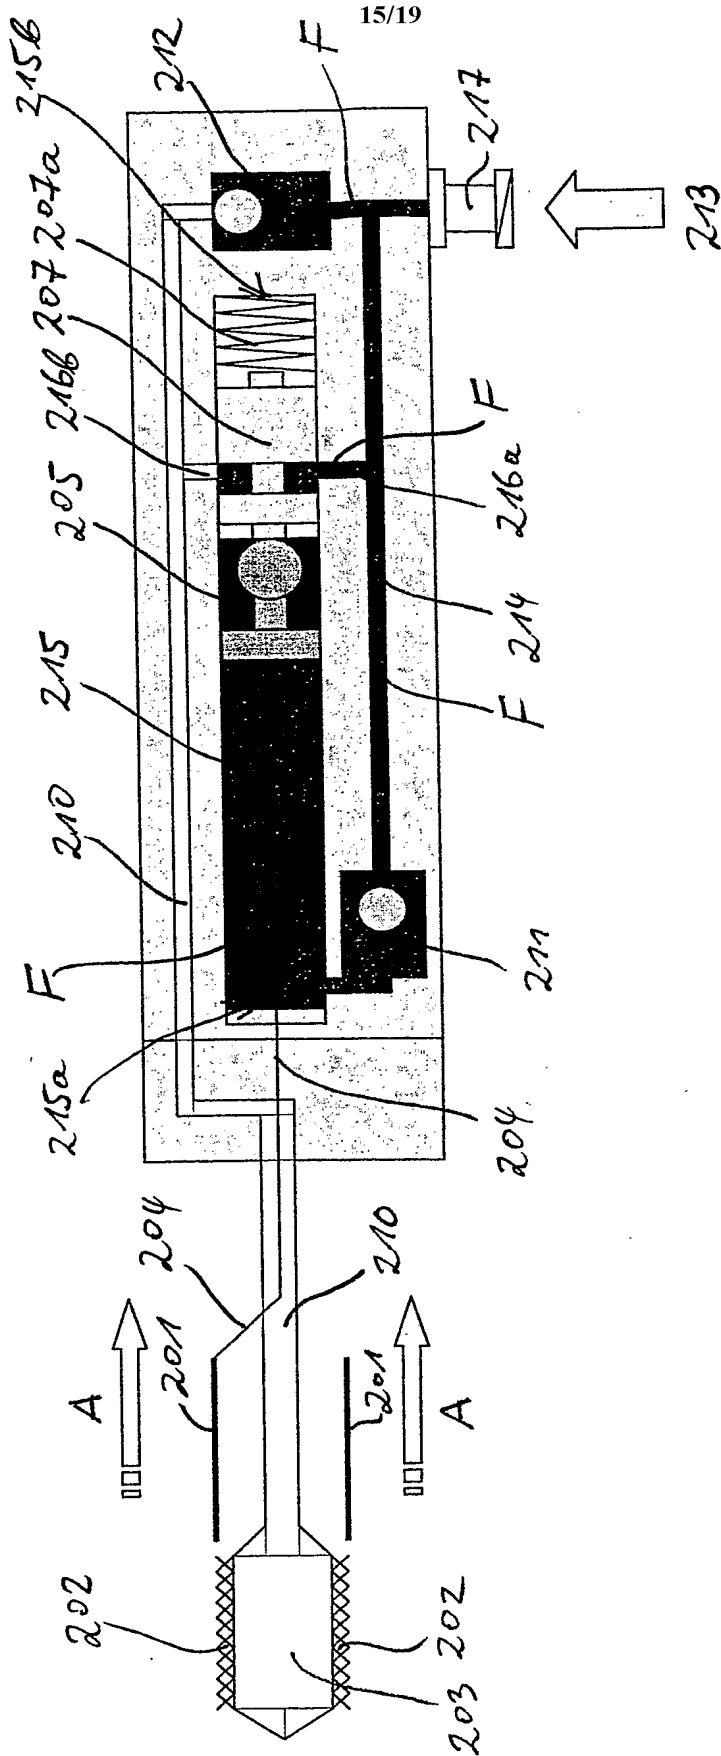


Fig. 15

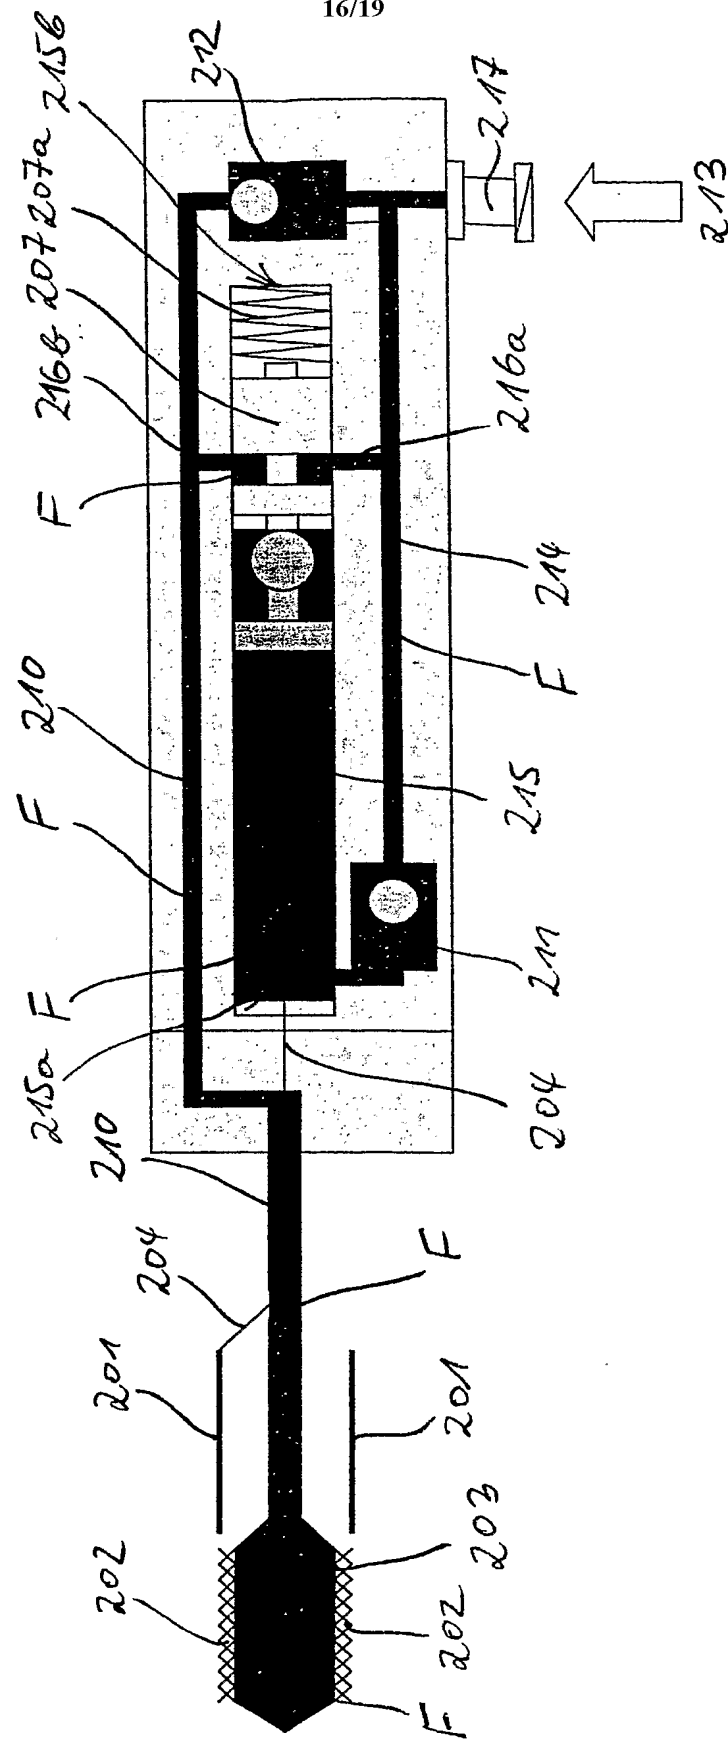


Fig. 16

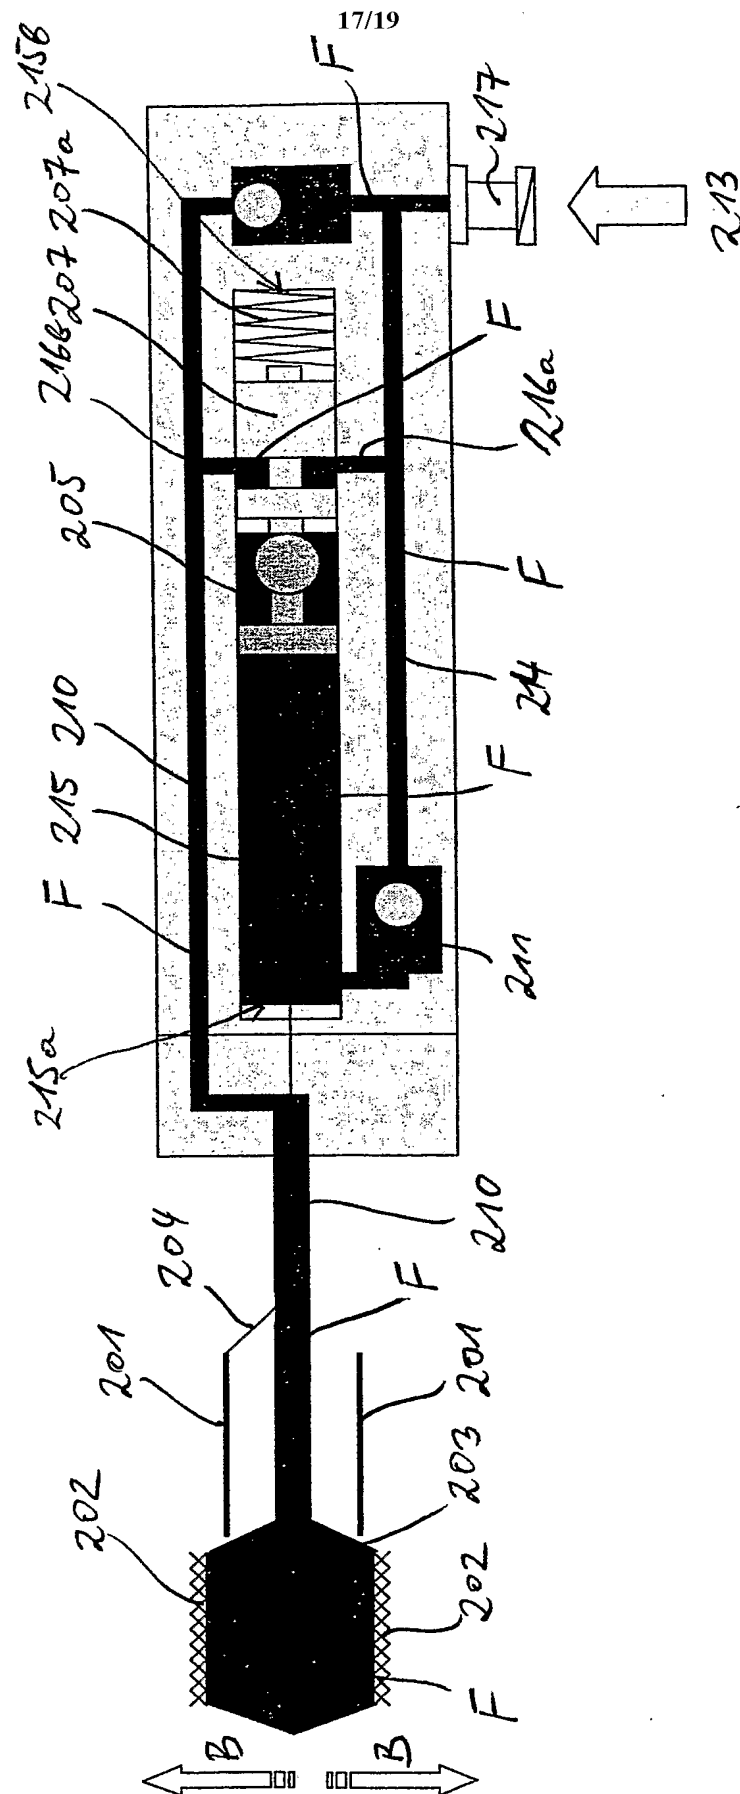


Fig. 17

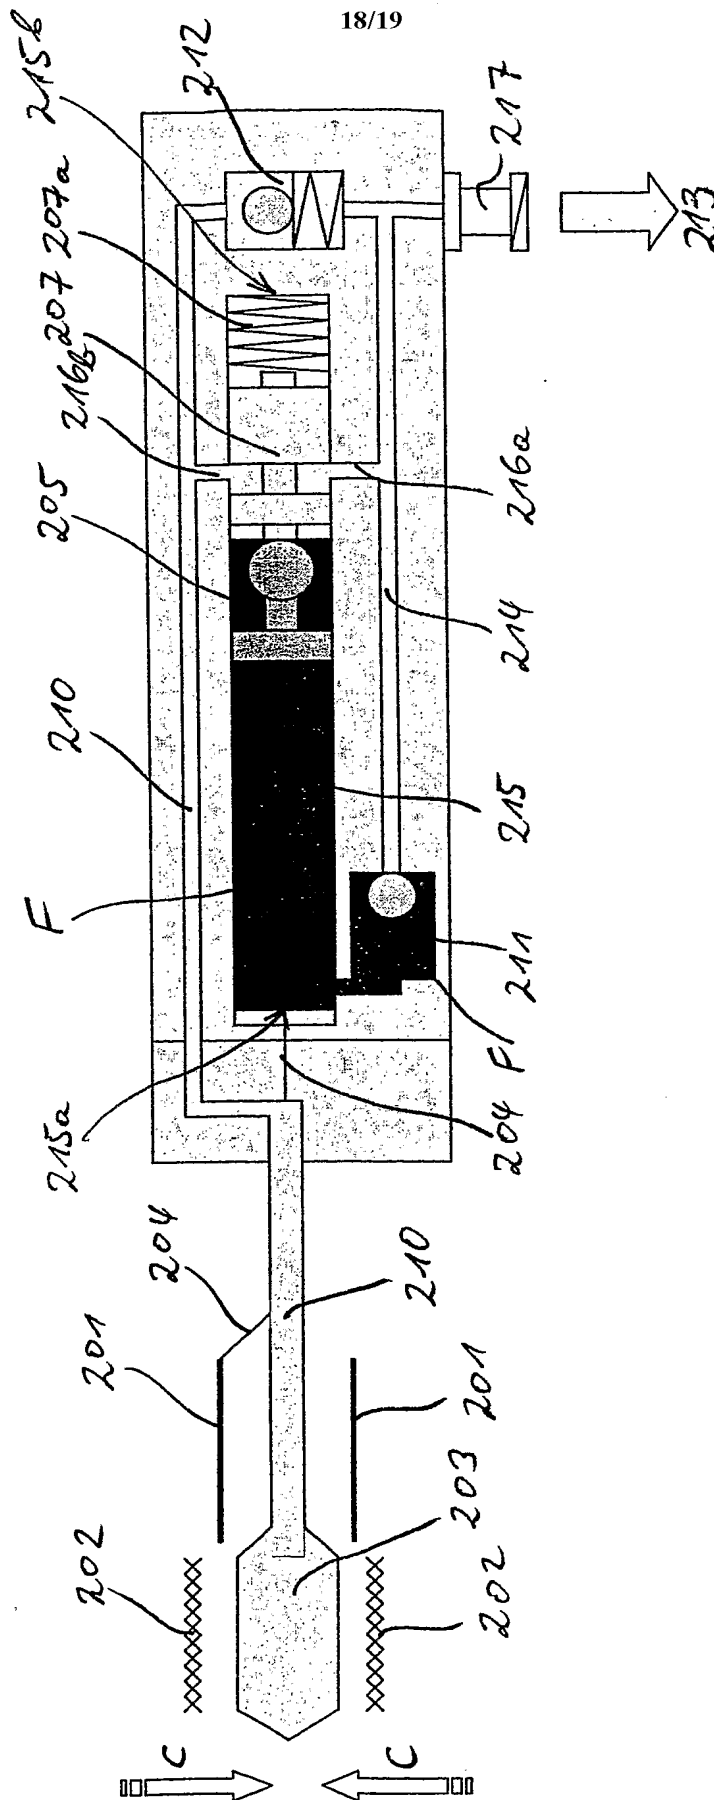


Fig. 18

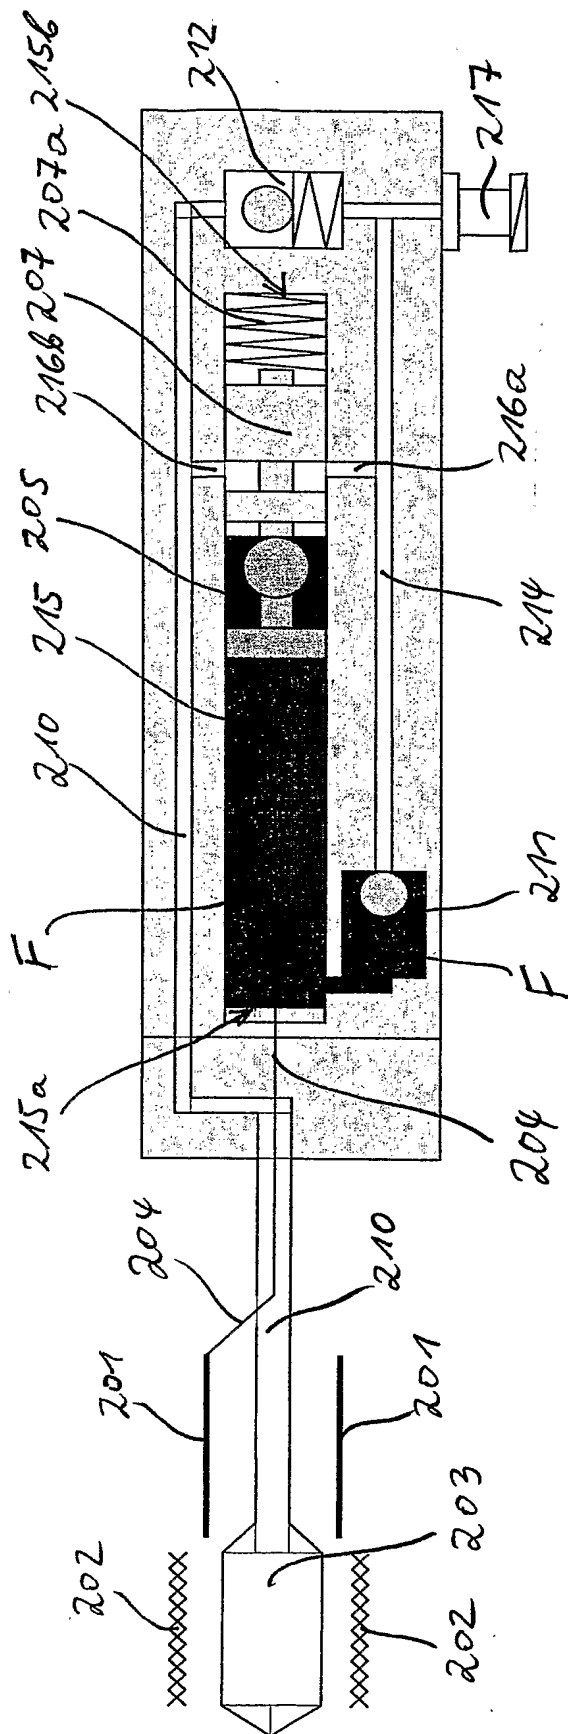


Fig. 19

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/08795

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 A61F2/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 A61F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

WPI Data, EP0-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2002/103525 A1 (CUMMINGS) 1 August 2002 (2002-08-01) paragraph '0028! - paragraph '0038!; figures 1,4	1
A	US 6 113 608 A (MONROE ET AL) 5 September 2000 (2000-09-05) cited in the application abstract; figures	1
A	WO 00 18330 A (IMPRA, INC.) 6 April 2000 (2000-04-06) page 10, line 12 -page 11, line 16; figures 8-12	1

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

- *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- *&* document member of the same patent family

Date of the actual completion of the international search

19 December 2003

Date of mailing of the international search report

02/01/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Smith, C

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 03/08795

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2002103525 A1	01-08-2002	CA 2434493 A1 EP 1357969 A2 WO 02060520 A2	08-08-2002 05-11-2003 08-08-2002
US 6113608 A	05-09-2000	NONE	
WO 0018330 A	06-04-2000	CA 2345686 A1 EP 1117341 A1 JP 2002525168 T WO 0018330 A1 US 2003144671 A1 US 6514261 B1	06-04-2000 25-07-2001 13-08-2002 06-04-2000 31-07-2003 04-02-2003